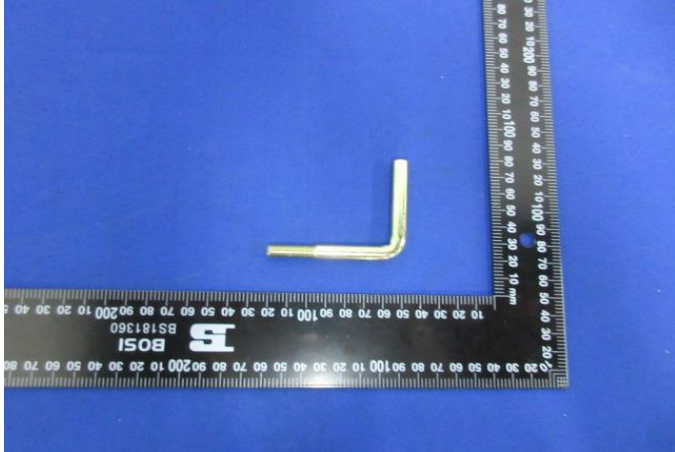
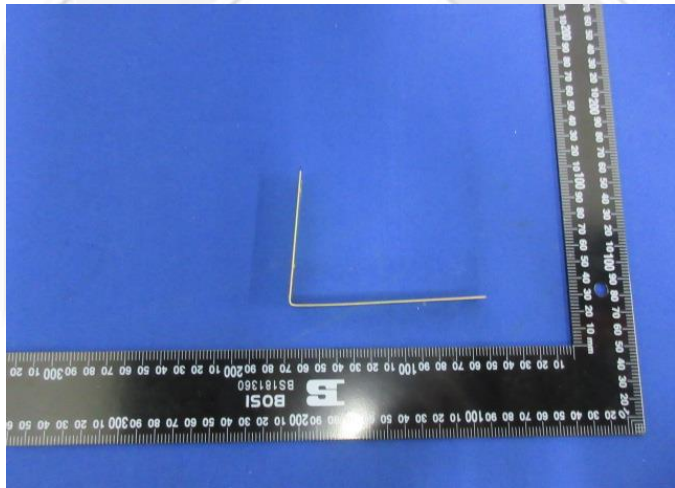
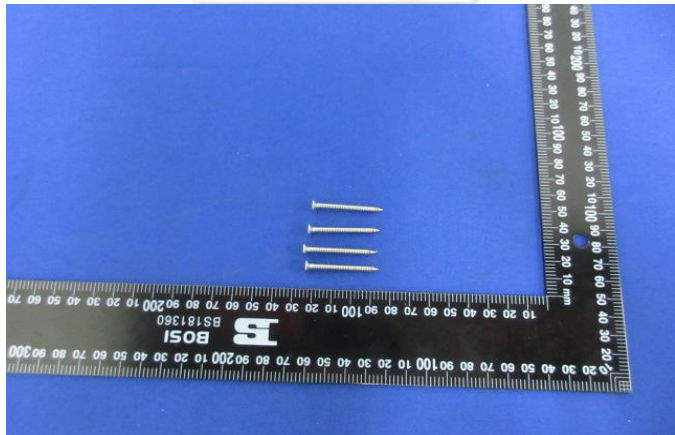
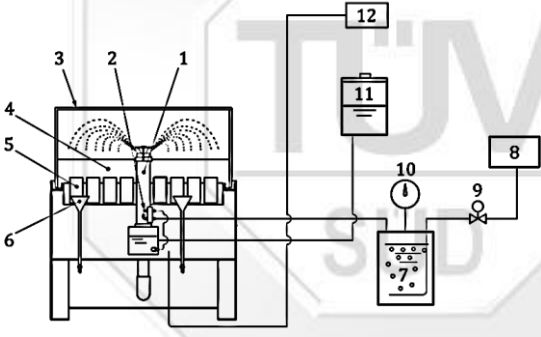


Description of the test subject:

1	Product Description	Parts of outdoor furniture
Product Photo		
		
		
		

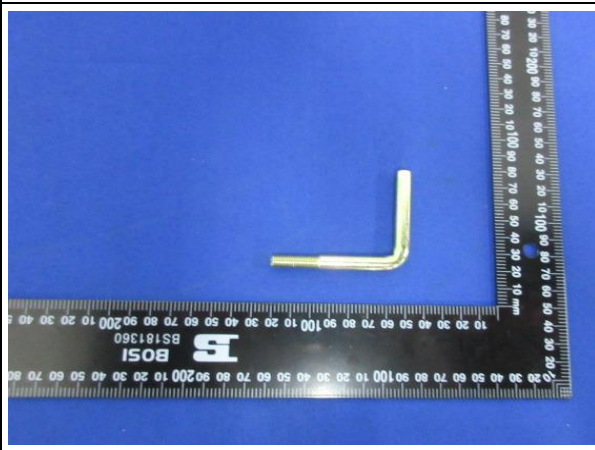
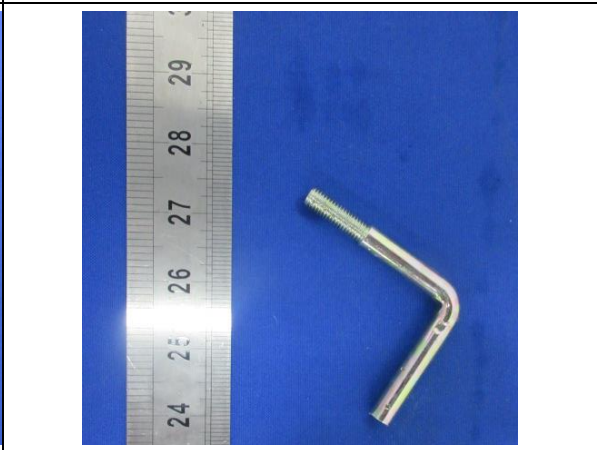
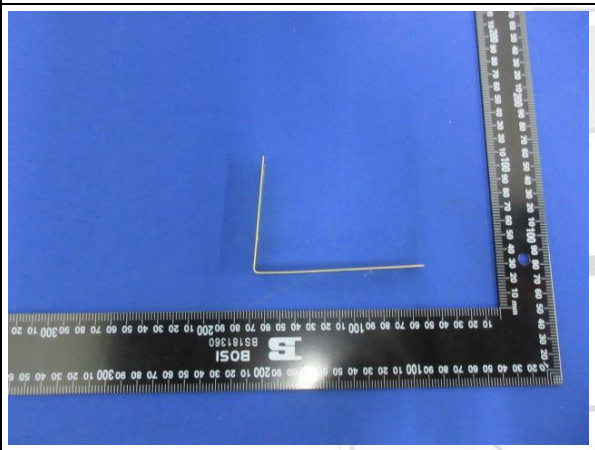
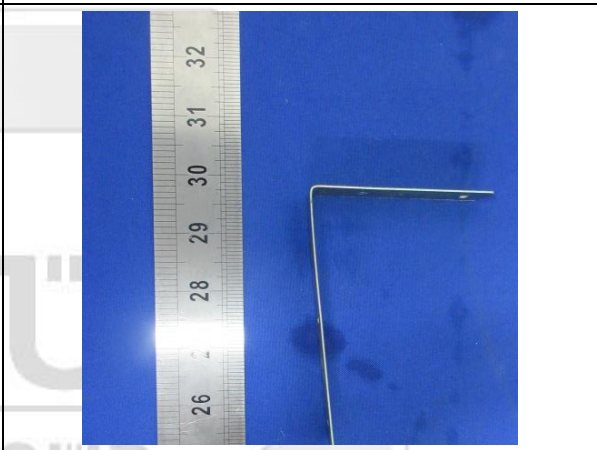
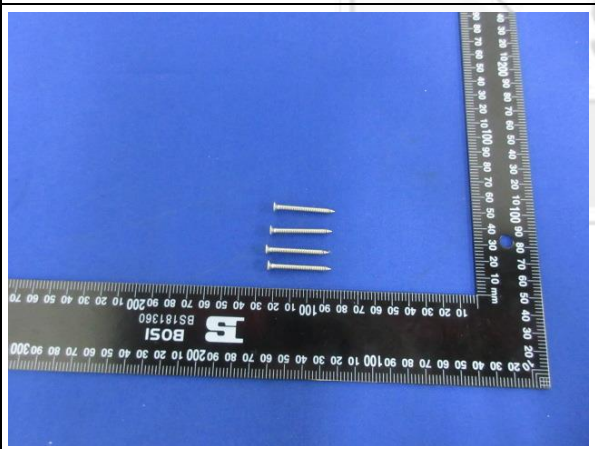

Test Results:

1. Neutral salt spray (NSS) 5% for 12hrs test according to ISO 9227:2017

Item	Requirement-test item	Result, Remark	Evaluation
<p>NSS (Neutral Salt Spray) Test</p>	<p>An apparatuses shown below shall be used. The test sample shall be placed in the cabinet so they are not in the direct line of travel of the spray from the atomizer.</p> <p>Test condition : Chamber temperature : 35 °C ± 2 °C Average collection rate for a horizontal collecting area of 80 cm² : 1,5 ml/h ± 0,5 ml/h Concentration of sodium chloride (collected solution) : 50 g/l ± 5 g/l NaCl pH (collected solution) : 6,5 to 7,2 Test period : 96hours</p> <p>After the test, the sample shall be evaluated by appearance.</p> 	<p>Requirements of customers is $R_A \geq 7$.</p> <p>Details see the following table and remark</p>	<p>P</p>

Abbreviation: P=Pass; F=Fail

Table 1

Before test	After test	Rating
		
		R _A = 10
		

Remark:

1. The test results exclusively base on the submitted sample.
2. Appearance rating assessed according to ISO 10289: 1999.

Area of defects A (%)	Appearance rating R _A
No defects	10
$0 < A \leq 0,1$	9
$0,1 < A \leq 0,25$	8
$0,25 < A \leq 0,5$	7
$0,5 < A \leq 1,0$	6
$1,0 < A \leq 2,5$	5
$2,5 < A \leq 5,0$	4
$5,0 < A \leq 10$	3
$10 < A \leq 25$	2
$25 < A \leq 50$	1
$50 < A$	0

-End of Test Report-

